


Floor Graphic Markers Symbol (Non-text)



Features and Benefits

- High visibility floor signs
- Safety signs for the floor or wall
- Large 430mm diameter
- Tested to R10 slip-resistance standard
- Choose from a range of symbol designs
- Highlights warnings or special requirements

A range of eye-catching, highly visible floor signs which will highlight warnings or special requirements. Printed on the underside of a tough clear plastic film and laminated with an aggressive adhesive means that these signs can be used in any busy industrial environment. Although originally designed for use on the floor they can also be used on walls or other surfaces provided that they are dry, clean, flat and sealed.

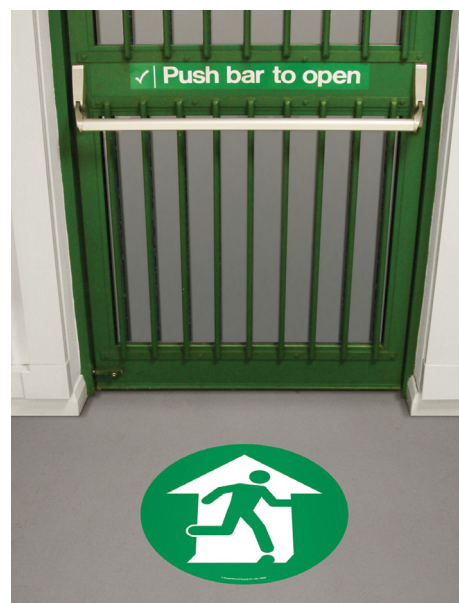

Material and Adhesive Specification

The Independent test laboratory at Adhesive Technical Services Ltd performed the temperature test, (test results available)

NB All wet floors are hazardous so slip risk when wet not specified. All the above data is for reference only.

Subject	Value	Test Method
Material	0.3mm PVC rigid film, plus DST	N/A
Type of adhesive	Solvent acrylic (0.082mm)	N/A
Double sided tape (DST)	0.095mm	N/A
Initial tack (cm)	12	PSTC-6
Peel adhesion (kg/25.4mm ²)	1.3	PSTC-1
Holding power (hr.25.4mm ²)	Over 1	PSTC-7
Resistance to water (months)	10	PSTC-35
Resistance to chemicals (months)	8	PSTC-35
Resistance to motor oil	Excellent	PSTC-35
Temperature range	-30° C ~ +70° C	See below
Slip assessment dry pendulum test	66 median low slip risk	PTV@45°+90°